CATALOGUE / IP FOG MACHINES / BASE ULTIMATE 220 V



BASE ULTIMATE 220 V

The ultimate is a powerful fog machine with unique direct heating.

It requires only the shortest possible heating time (2 sec.) and also has a stainless steel housing with IP64 protection class. The possible applications are varied and range from theme parks and fire drills to large stages.



Manual (English)




Bedienungsanleitung (Deutsch)

FEATURES

SPECIFICATIONS

GALLERY

RELATED PRODUCTS

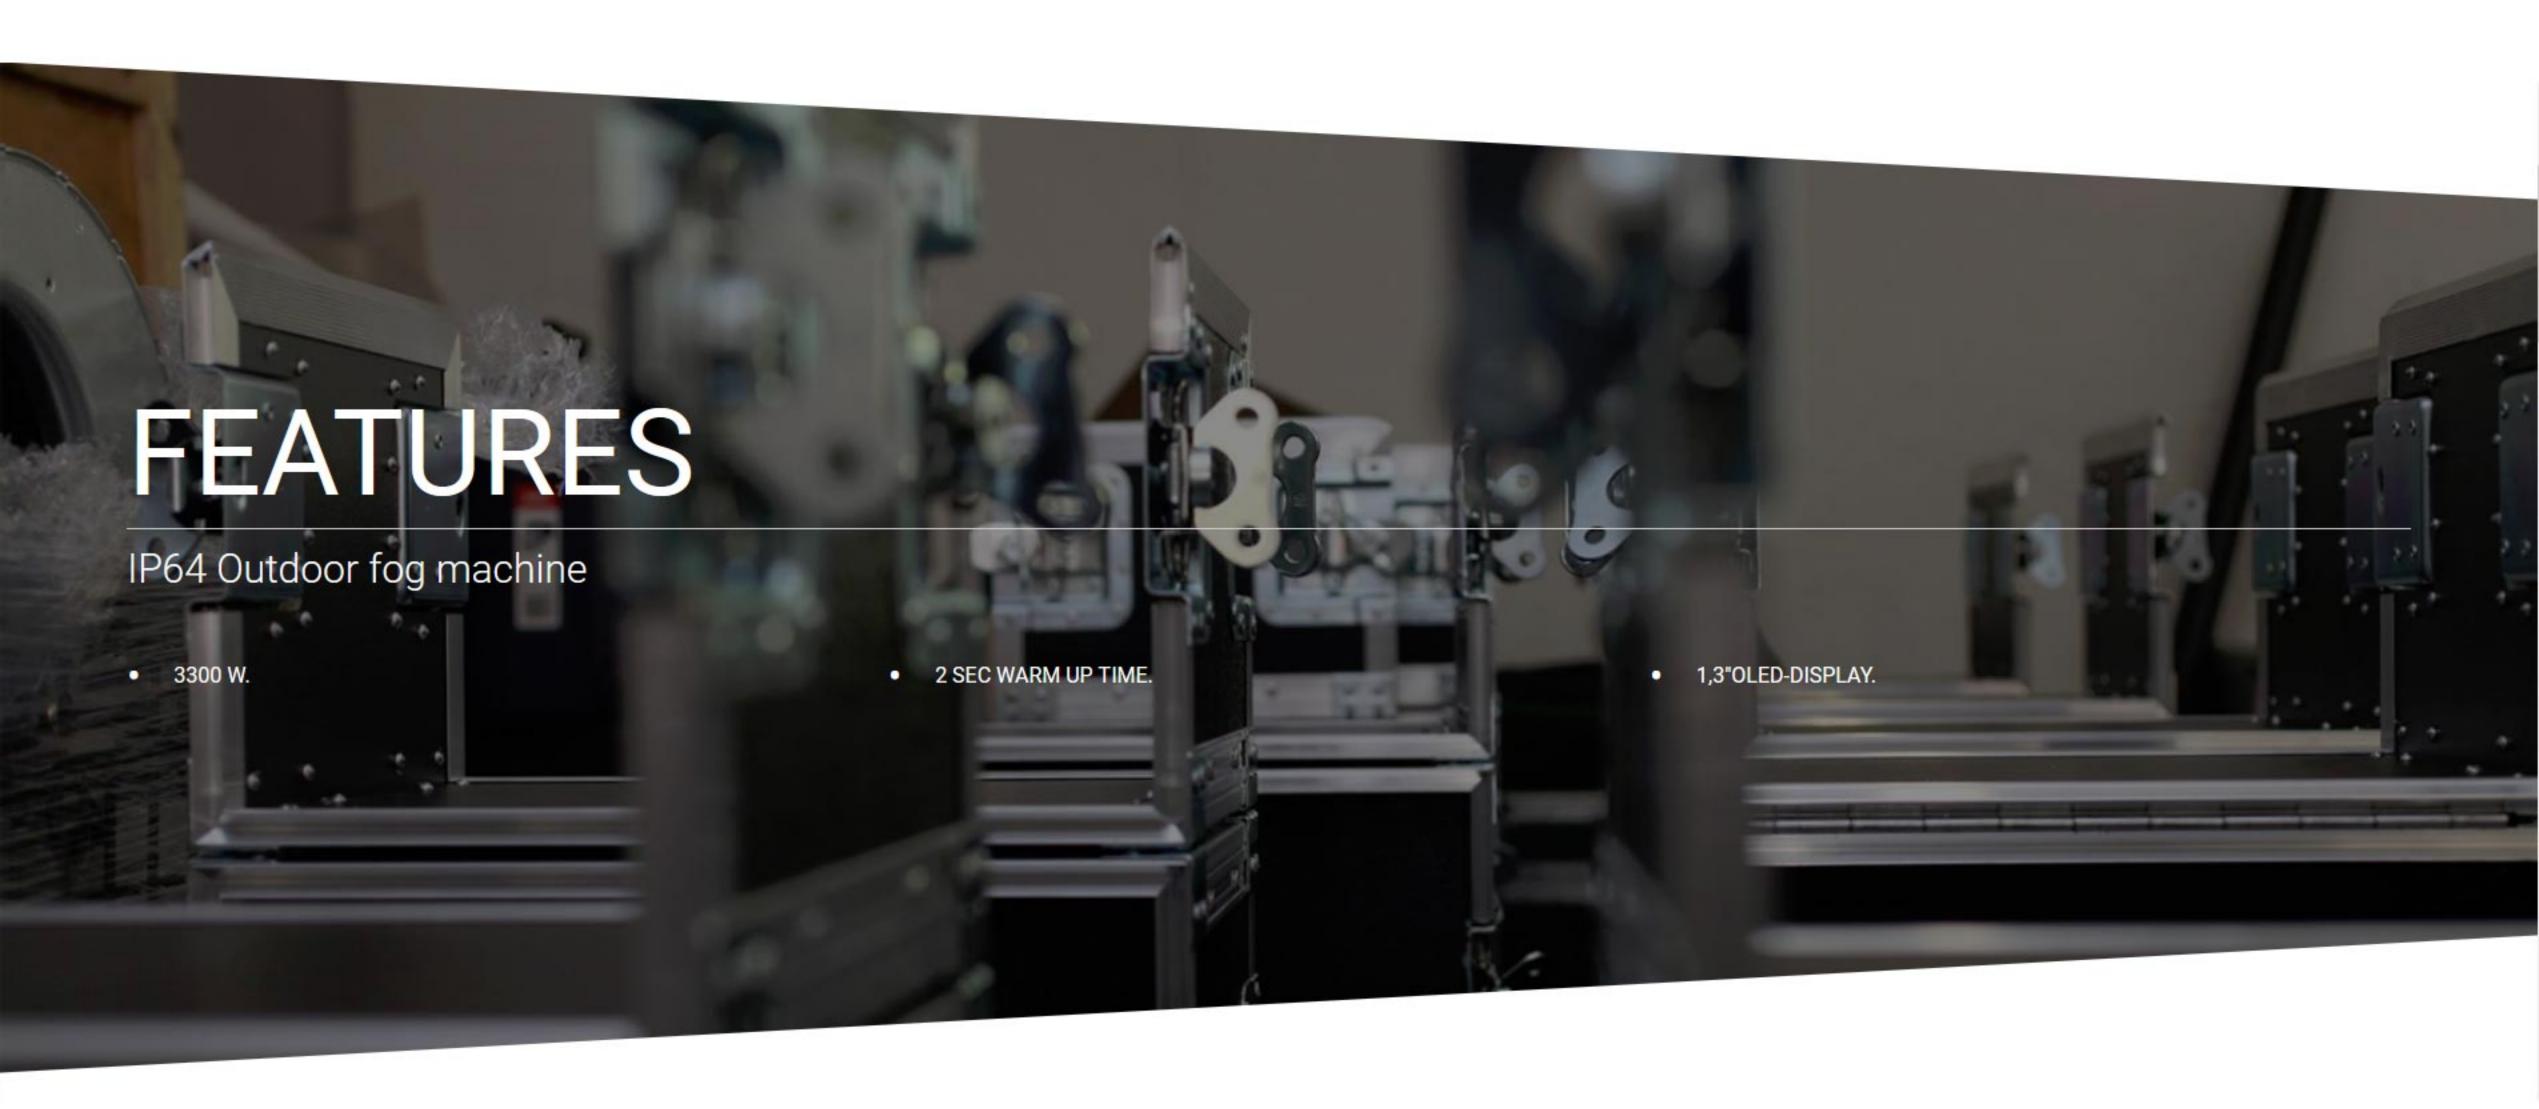

SPECIFICATIONS

Instant vaporizing fog machine

Connection data 200-250 V~, 50-60 Hz, 3300 W (PowerCON TRUE1)

Warm up time 2 seconds

Fluid bottle 5 Liter or 1.32 Gallons

Fluid consumption	Up to 90ml/min
Operation	1,3" OLED-Display
CFM (Cubic Feet per Minute)	75,000 CFM
Communication interface	5 pol XLR In/out DMX, Aux-In (Analog 0-10V)
Supported protocols	DMX512, RDM, direct by SPS controllable (24V)
Control	DMX, analog, integrated timer, stand a lone mode
Protection class	IP64
Approved, tested fluids*	Hazebase BaseR - Quick Dissipating Hazebase BaseF - High Density
Weight	12.5 kg or 27.5 lbs
Dimensions (LxBxH)	487x200x235 mm (height with fluid basket: 388mm) or 19.2 x 7.9 x 9.3 inches (height with tank holder 15.3 inches)

GALLERY

Ultimate fog machine



RELATED PRODUCTS

Related products, options, and accessories



Base Fog Fluid Base R

Base Fog Fluid has been specially formulated to work in any situation.



Base Fog Fluid Base F

Base Fog Fluid has been specially formulated to work in any situation.